


SLIM SERIES



Product Parameter


Part Number	DG-SL01-10W	DG-SL01-50W	DG-SL01-100W	DG-SL01-150W	DG-SL01-200W
Wattage	10W	50W	100W	150W	200W
Lumen Output	1300lm	6500lm	13000lm	19500lm	26000lm
Light Efficiency	130lm/w				
Dimensions(mm)	166*107*32	310*220*50	390*295*60	430*330*60	470*360*60
CRI	>Ra70, >Ra80				
CCT	3000K, 4000K, 5000K, 5700K, 6500K				
Input Voltage	100-240Vac, 100-277Vac, 50-60Hz, PF≥0.95				
IP Rating	IP65				
LED Driver	Meanwell, Sosen, Philips				
Working Temperature	-30°C to +50°C				
Lifespan	>50,000Hrs				

Light Distribution



Outline Drawing

	10W	20W	30W	50W	80W	100W	150W	200W
L (mm)	166	216	226	310	354	390	430	470
W (mm)	107	152	167	220	245	295	330	360
H (mm)	32	40	40	50	55	60	60	60

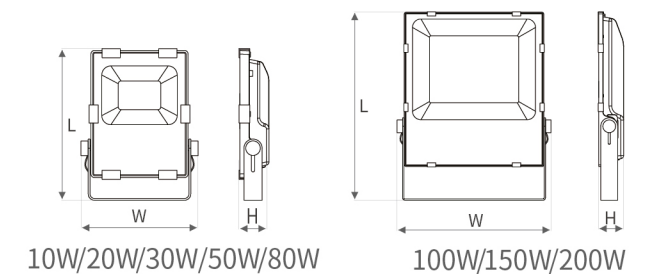

Intelligent Control Option

- Dali Control
- 1-10V Dimming Control
- Occupancy Control
- DMX Control

Slim is with excellent heat sink surface finish by Electrostatic spray treatment and highly cost-effective. It also has strong anti-corrosion and anti-aging ability, and can adapt to various harsh environment.

According to the rules of heat conduction, the heat sink is equipped with cooling fins set in a sparse pattern to carry the heat from center into perimeter. Plus the aid of the surrounding venting holes, Slim could achieve the outstanding performance of heat dissipation.

130 lm/W IP65 IK10 UGR<22 SDCM<5

10W, 20W, 30W, 50W, 80W, 100W, 150W, 200W
130lm/W

Beam angle: 60deg, 90deg, 120deg
LM80, ISTMT and TM21 report available
5 years warranty

Wide range of lumen output package
from 1,300lm up to 26,000lm

