




Product Parameter

Part Number	DG-PL01-25W	DG-PL01-30W	DG-PL01-36W
Wattage	25W	30W	36W
Lumen Output	3375lm	4050lm	4860lm
Light Efficiency	135lm/w		
Dimensions	Multi-size		
CRI	>Ra70, >Ra80		
CCT	3000K, 4000K, 5000K, 5700K, 6500K		
Input Voltage	100-240Vac, 100-277Vac, 50-60Hz, PF≥0.95		
IP Rating	IP20, IP40, IP54		
LED Driver	Philips, Lifud		
Working Temperature	-30°C to +50°C		
Lifespan	>50,000Hrs		

Light Distribution

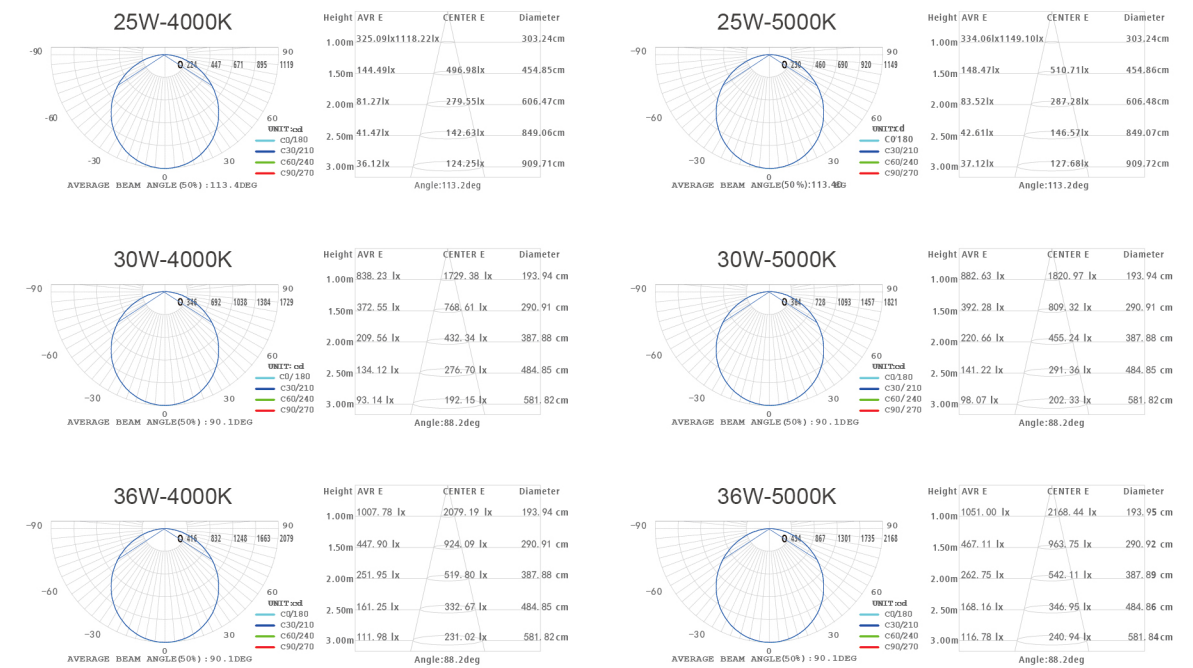


Aster Plus Series

135 lm/W IP20 UL94V-2 UGR<19 SDCM<3

25W, 30W, 36W
 135lm/W
 Beam angle: 110deg(Standard)
 75deg(UGR<19)
 LM80, ISTMT and TM21 report available
 5 years warranty
 Wide range of lumen output package
 from 3,375lm up to 4,860lm



Outline Drawing

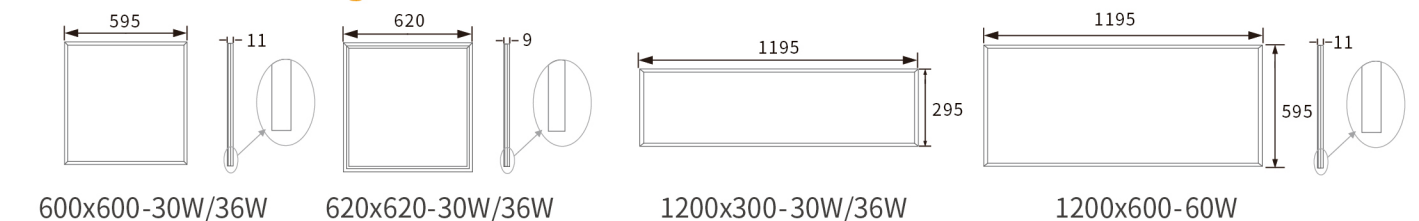

Intelligent Control Option

- 1-10V Dimming Control
- DALI Control

