





Product Parameter

Part Number	DG-PL02-18W	DG-PL02-22W	DG-PL02-36W	DG-PL02-60W
Wattage	18W	22W	36W	60W
Lumen Output	1800lm	2200lm	3600lm	6000lm
Light Efficiency	100lm/w			
Dimensions	Multi-size			
CRI	>Ra70, >Ra80			
CCT	3000K, 4000K, 5000K, 5700K, 6500K			
Input Voltage	100-240Vac, 100-277Vac, 50-60Hz, PF≥0.95			
IP Rating	IP20, IP40, IP54			
LED Driver	Philips, Lifud			
Working Temperature	-30°C to +50°C			
Lifespan	>50,000Hrs			

Light Distribution

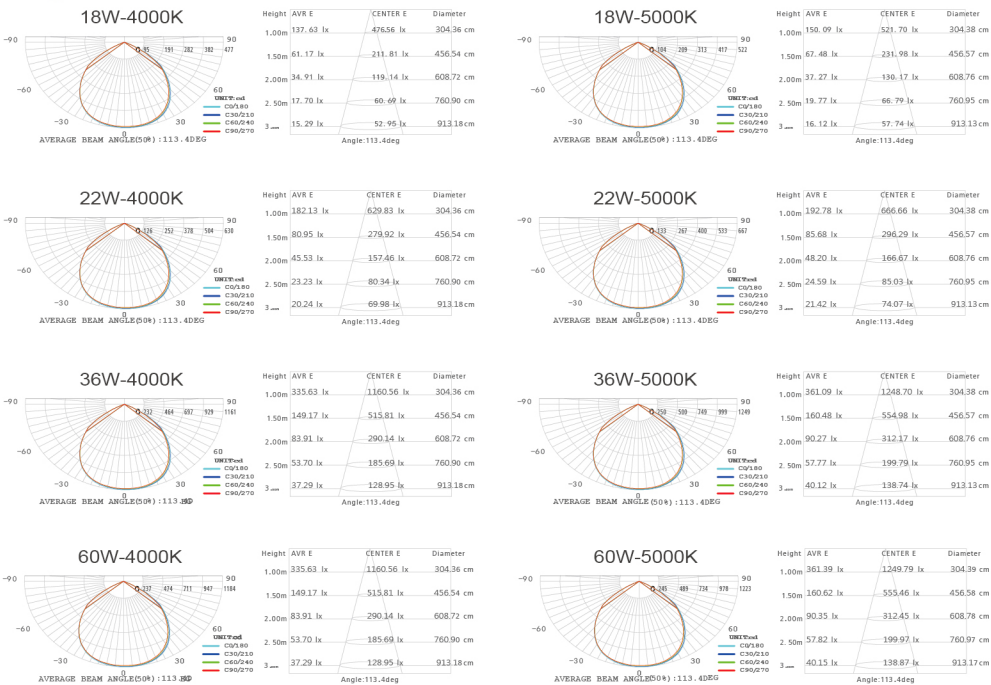

Outline Drawing

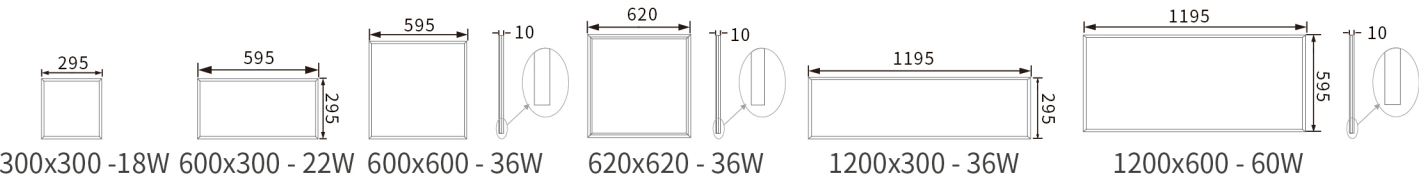

Intelligent Control Option

- 1-10V Dimming Control
- DALI Control

Aster Basic Series

100 lm/W IP20 UL94V-2 UGR<19 SDCM<3

18W, 22W, 36W, 60W
 100lm/W
 Beam angle: 110deg(Standard)
 75deg(UGR<19)
 LM80, ISTMT and TM21 report, available
 5 years warranty
 Wide range of lumen output package
 from 1,800lm up to 6,000lm

