


Aster Emergency Series




30W, 40W, 50W
 100lm/W
 Beam angle: 100deg (Standard)
 75deg(UGR<19)
 LM80, ISTMT and TM21 report, available
 5 years warranty
 Wide range of lumen output package
 from 3,000lm up to 5,000lm

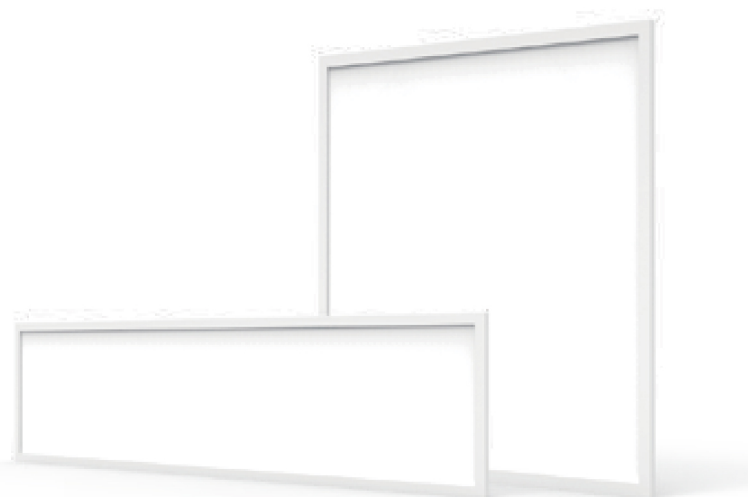


Product Parameter

Part Number	DG-PL03-30W	DG-PL03-40W	DG-PL03-50W
Wattage	30W	40W	50W
Lumen Output	3000lm	4000lm	5000lm
Light Efficiency	100lm/w		
Dimensions	Multi-size		
CRI	>Ra70, >Ra80		
CCT	3000K, 4000K, 5000K, 5700K, 6500K		
Input Voltage	100-240Vac, 100-277Vac, 50-60Hz, PF≥0.95		
IP Rating	IP20, IP40, IP54		
LED Driver	Tridonic, Customized		
Working Temperature	-30°C to +50°C		
Lifespan	>50,000Hrs		

Emergency Panel

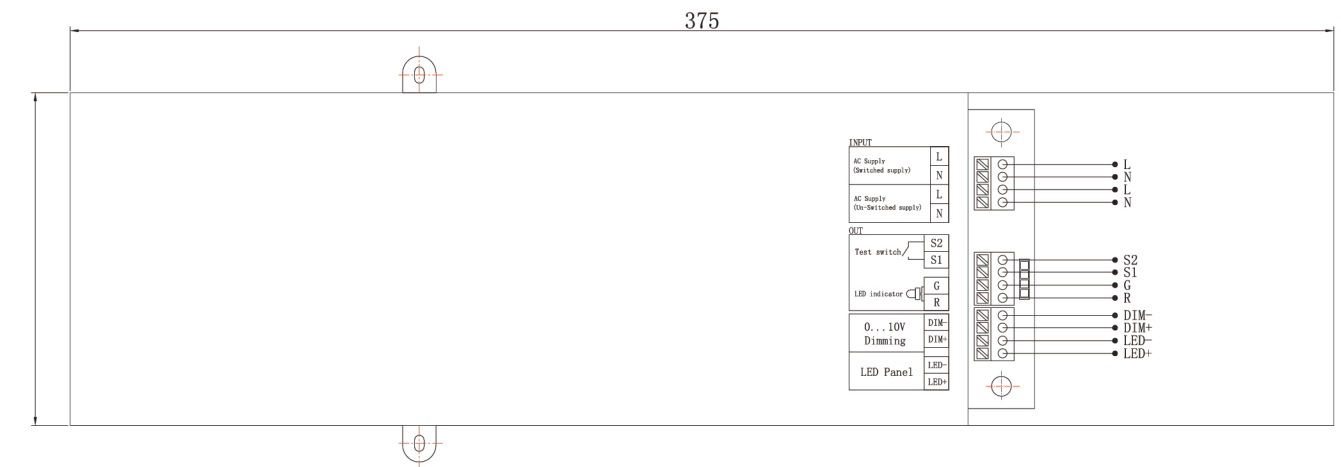

Outline Drawing

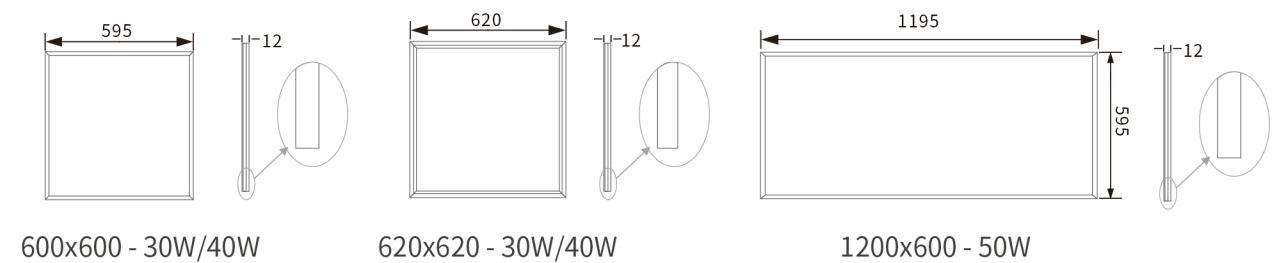

Intelligent Control Option

- 1-10V Dimming Control
- DALI Control